




## China Abec 11 Bearings Supplier

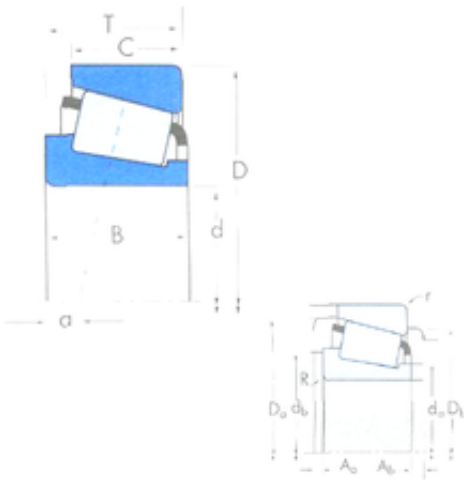

L432349/L432310 Bearing 2D drawings and 3D CAD models

Good quality TIMKEN brand Tapered roller bearing L432349/L432310 L432348/L432310 3579/3525 P0 precision for Poland

Bearing No. L432349/L432310

|                               |                          |
|-------------------------------|--------------------------|
| Size                          | 158.75x205.583x23.812 mm |
| Bore Diameter                 | 158,75 mm                |
| Outer Diameter                | 205,583 mm               |
| Width                         | 23,812 mm                |
| d                             | 158,75 mm                |
| D                             | 205,583 mm               |
| T                             | 23,812 mm                |
| B                             | 23,812 mm                |
| C                             | 18,258 mm                |
| R                             | 1,5 mm                   |
| r                             | 1,5 mm                   |
| a                             | 9,4 mm                   |
| Da                            | 199 mm                   |
| db                            | 168 mm                   |
| da                            | 166 mm                   |
| Db                            | 195 mm                   |
| Aa                            | 2 mm                     |
| Ab                            | 1,2 mm                   |
| Weight                        | 1,92 Kg                  |
| Basic static load rating (C0) | 280 kN                   |
| Factor (G1)                   | 319,5                    |
| Factor (G2)                   | 177,3                    |
| Factor (Cg)                   | 0,0511                   |
| Factor (K)                    | 1,57                     |
| Basic dynamic load rating     | 35,3                     |



## China Abec 11 Bearings Supplier

|                                     |        |
|-------------------------------------|--------|
| (C90)                               |        |
| Basic dynamic load rating<br>(Ca90) | 22,5   |
| Basic dynamic load rating<br>(C1)   | 136 kN |
| Calculation factor (e)              | 0,37   |